


## > INW - HC high capacity blowers/exhausters

### > PERFORMANCE CURVES > VACUUM

Performance curves (50 Hz)

Performance curves are defined for the air transportation with the temperature 15 °C set for the suction by the atmospheric pressure 1013 mbar with the permissible deviation +/- 10%. Total pressure difference is valid for the temperature of the suction air and the ambient operating temperature 25 °C.

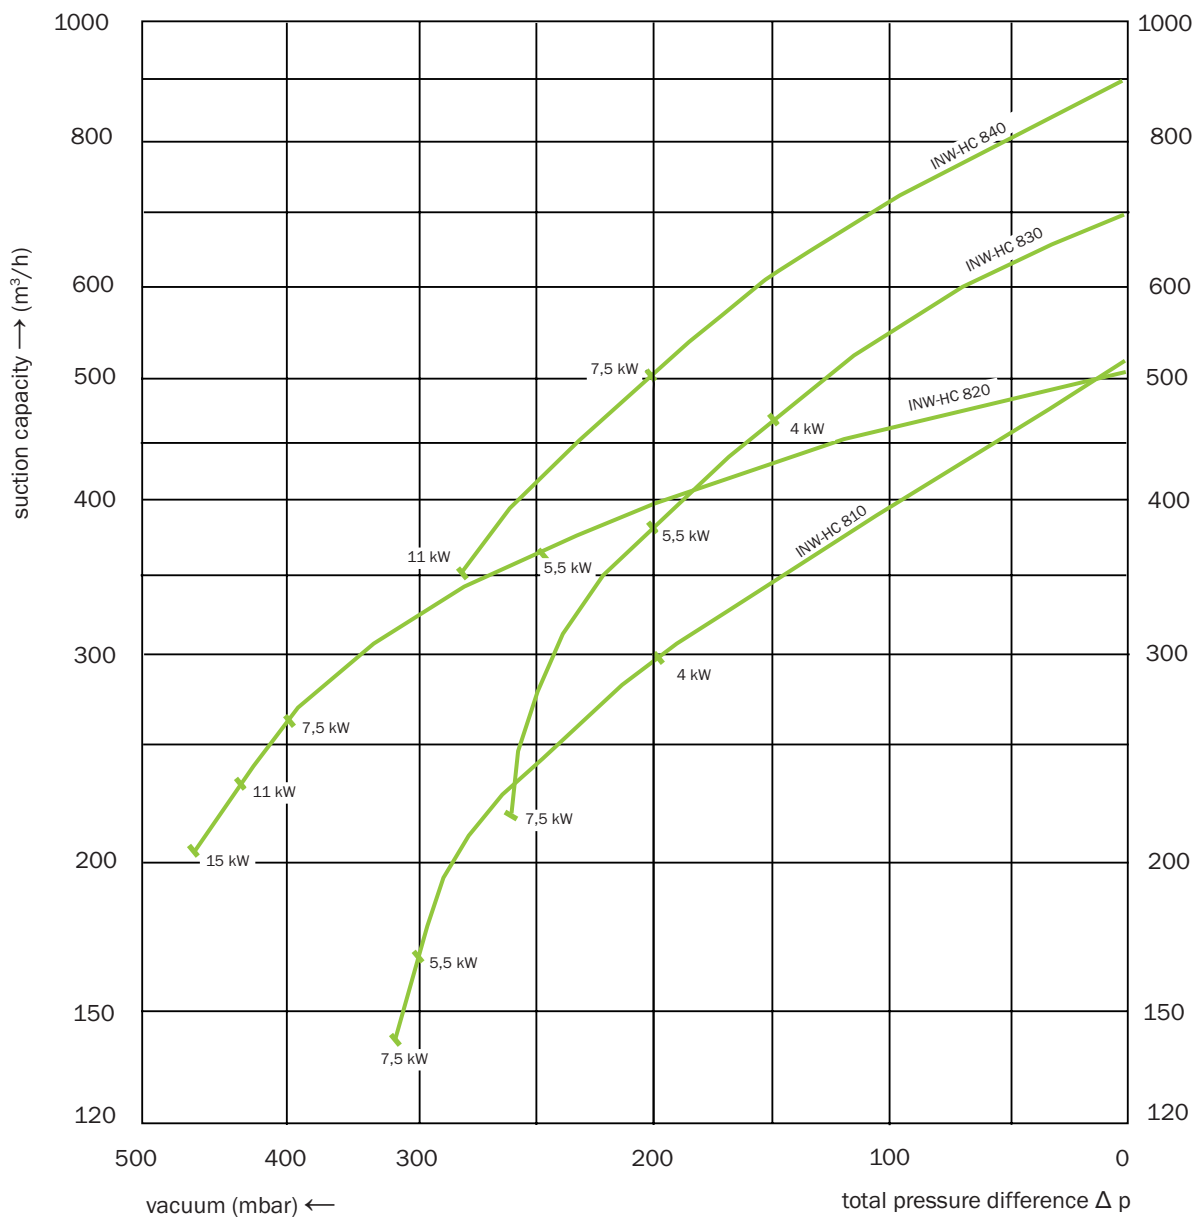

INW-HC high capacity blowers/exhausters meet Directive 2002/95/EC of European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.



NW-HC high capacity blowers/exhausters conform to the European Community's Machinery Directive (CE).