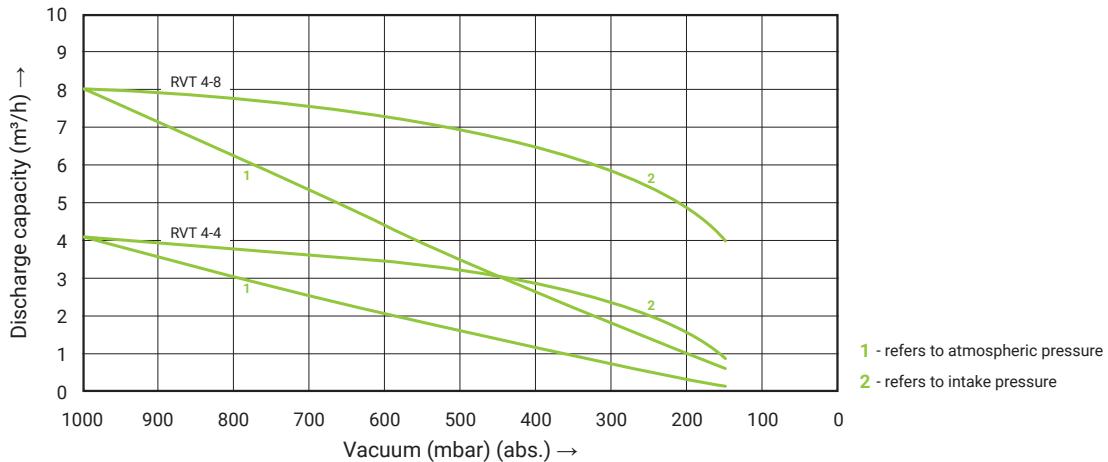


Rotary vane pumps RVT 4-4, RVT 4-8

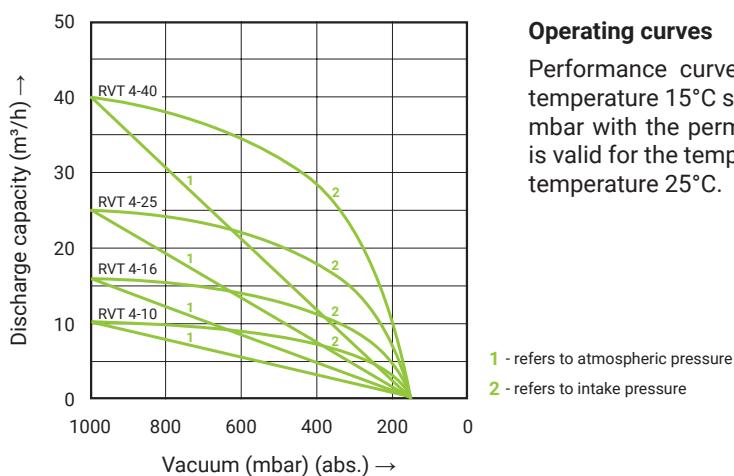
Performance curves / Vacuum

**Operating curves**

Performance curves are defined for the air transportation with the temperature 15°C set for the suction by the atmospheric pressure 1013 mbar with the permissible deviation +/-10%. Total pressure difference is valid for the temperature of the suction air and the ambient operating temperature 25°C.

Rotary vane pumps RVT 4-10, RVT 4-16, RVT 4-25, RVT 4-40

Performance curves / Vacuum

**Operating curves**

Performance curves are defined for the air transportation with the temperature 15°C set for the suction by the atmospheric pressure 1013 mbar with the permissible deviation +/-10%. Total pressure difference is valid for the temperature of the suction air and the ambient operating temperature 25°C.

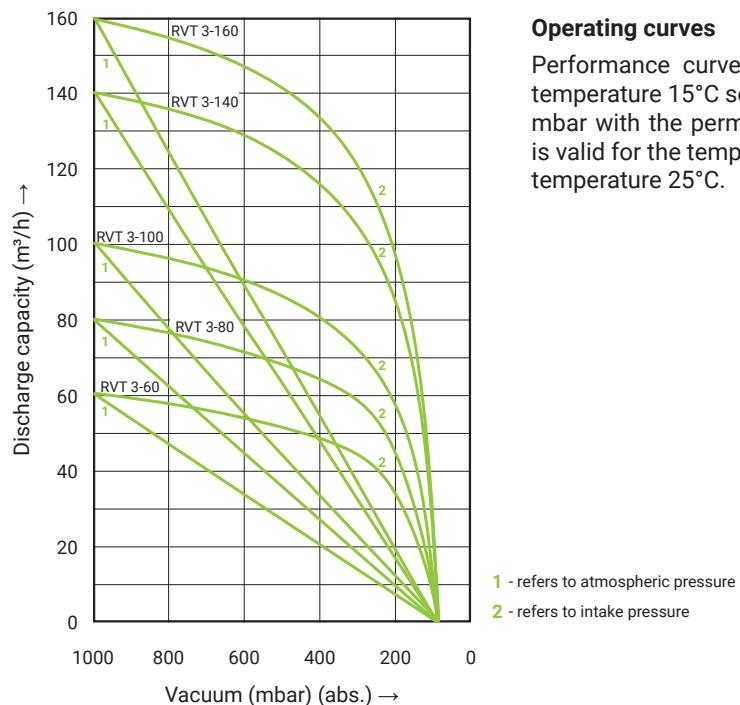
1 - refers to atmospheric pressure
2 - refers to intake pressure



RVT vacuum pumps conform to the European Community's Machinery Directive (CE).

Rotary vane pumps RVT 3-60, RVT 3-80, RVT 3-100, RVT 3-140, RVT 3-160

Performance curves / Vacuum

**Operating curves**

Performance curves are defined for the air transportation with the temperature 15°C set for the suction by the atmospheric pressure 1013 mbar with the permissible deviation +/-10%. Total pressure difference is valid for the temperature of the suction air and the ambient operating temperature 25°C.

- 1 - refers to atmospheric pressure
2 - refers to intake pressure



RVT vacuum pumps conform to the European Community's Machinery Directive (CE).